


ExpressTab ET01L-4G-FS

Assembly Instructions

Tip: The stand is heavy and is easiest to secure the screws while upside down.


Note: please ensure these screws are securely fastened as this is important to the stability of the stand.

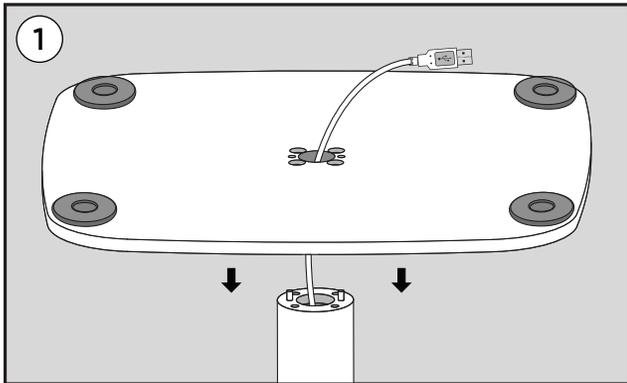


Secure the base to the bottom of the pole with 4 screws (screw A).

Ensure the USB cable is passed through the centre of the base and the 2 pins on the bottom of the pole sit into the corresponding holes on the base. Leave the cable taped down at the top of the pole.

Note: Be careful not to damage the cable at the top of the pole by putting the full weight of the stand on it

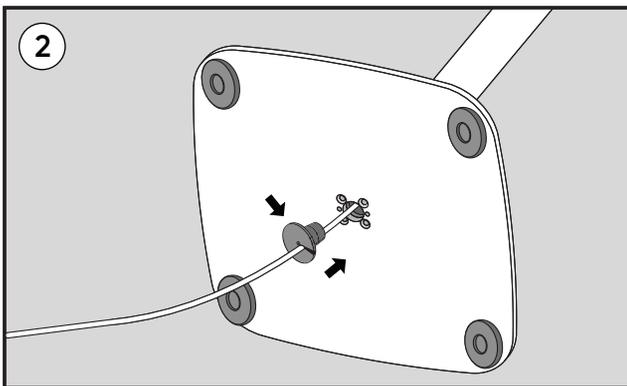


Add 1 of the rubber plugs to the hole at the bottom of the base and feed the cable through the slit in the plug. Securely press the plug into the hole.

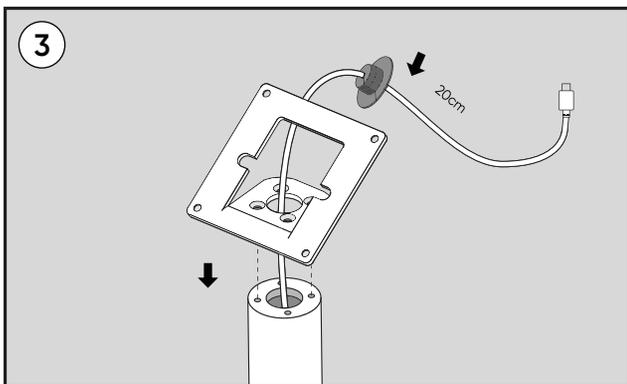


Turn the stand the right way up and secure the vesa bracket on the top of the pole with the 4 screws provided (screw A).


First ensure the cable is through the bottom of the bracket, as shown in the image.

Once secure, add the other rubber plug at the top of the pole. You will only need a maximum of 20cm of cable at the top, the rest should be pulled through the bottom of the pole.

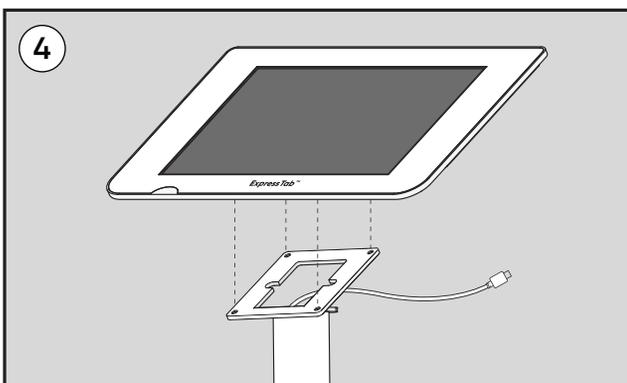

Secure the ExpressTab to the bracket with the 4 x screws (screw B) provided. Check the tablet is the right way up.

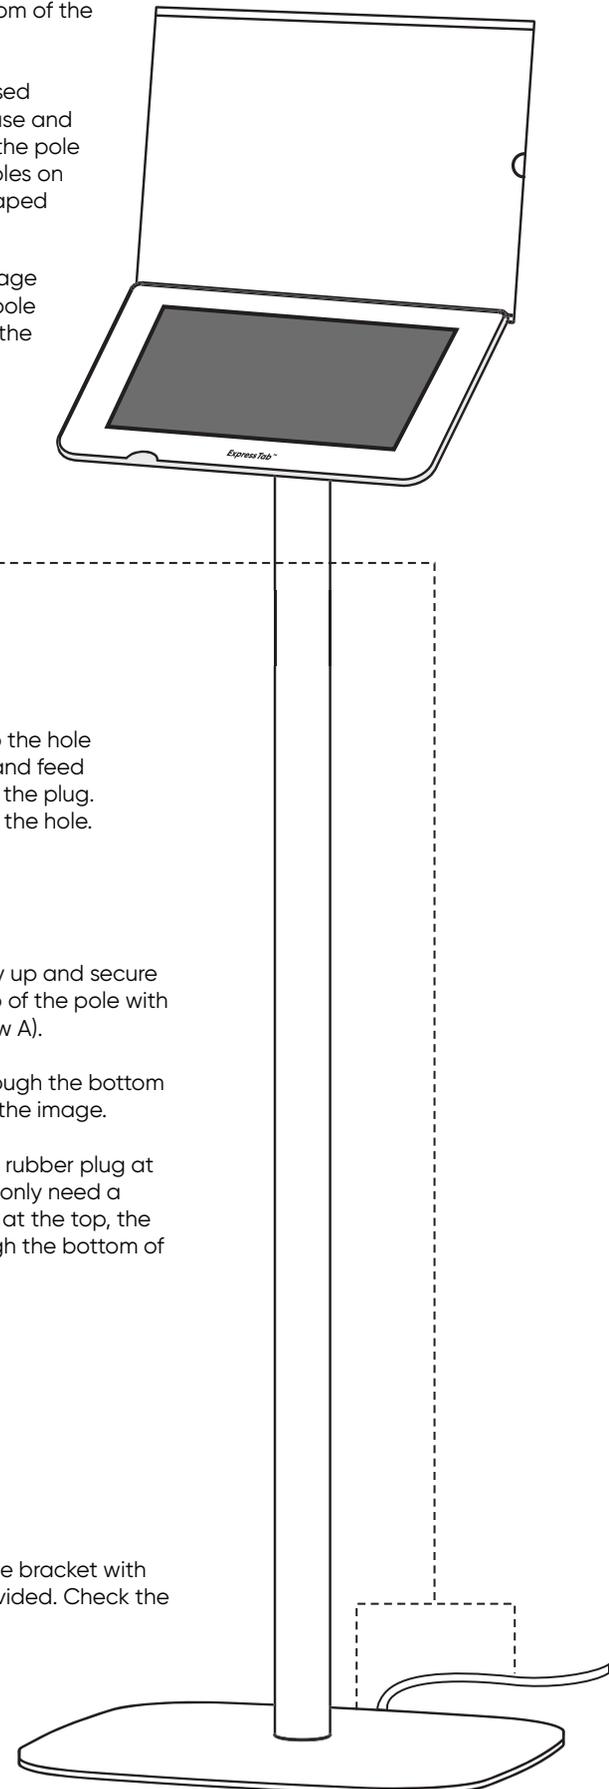




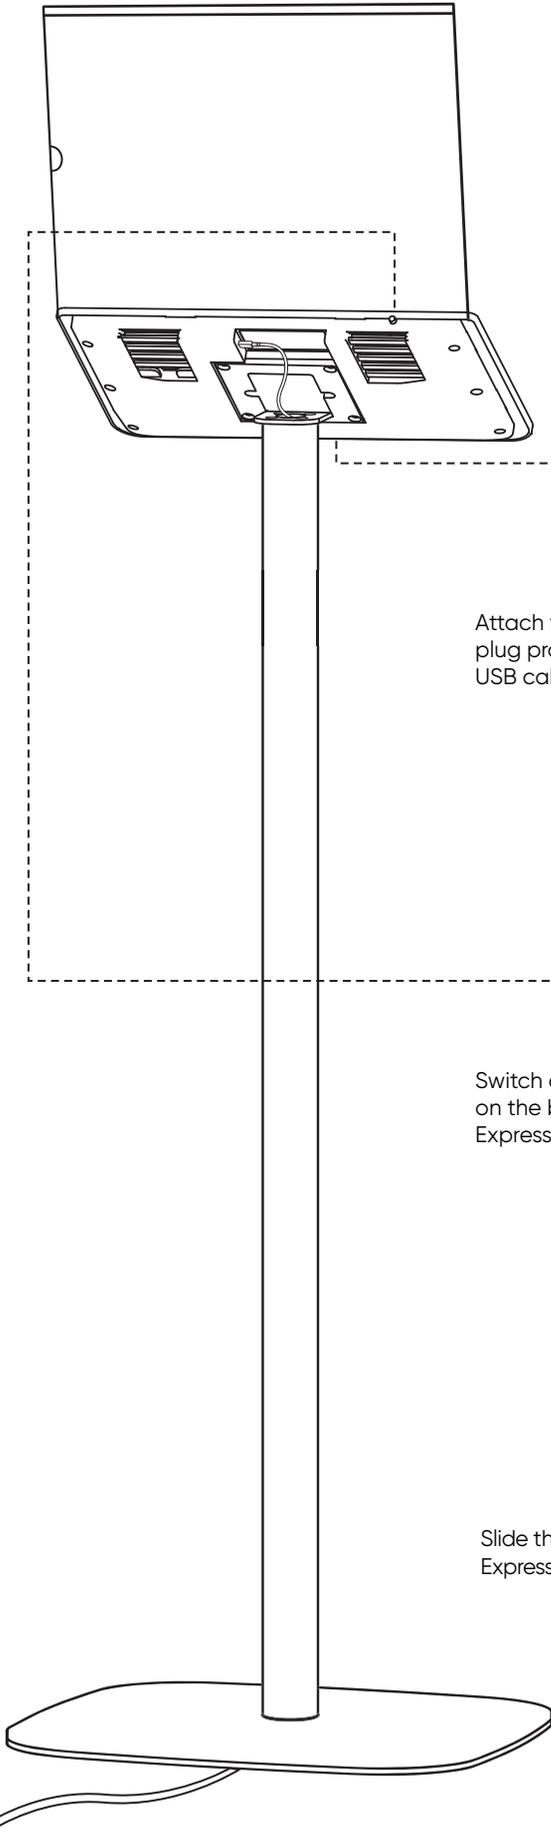


Connect the USB cable to the tablet. The connection is on the reverse of the tablet, above the vesa bracket.

Attach the correct adapter to the plug provided and connect this to the USB cable at the bottom of the stand.


Switch on the ExpressTab by pressing on the button at the top of the ExpressTab.

Slide the question holder tabs into the ExpressTab enclosure until they click.

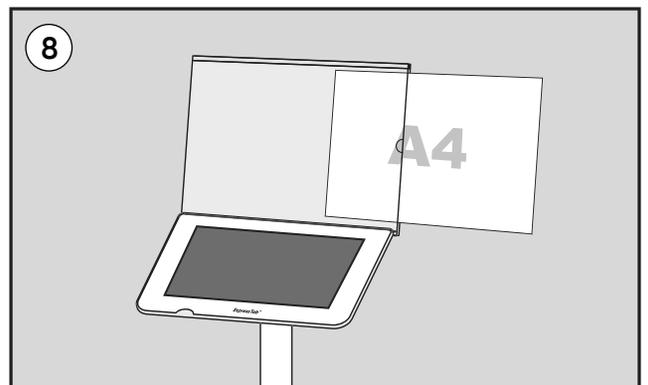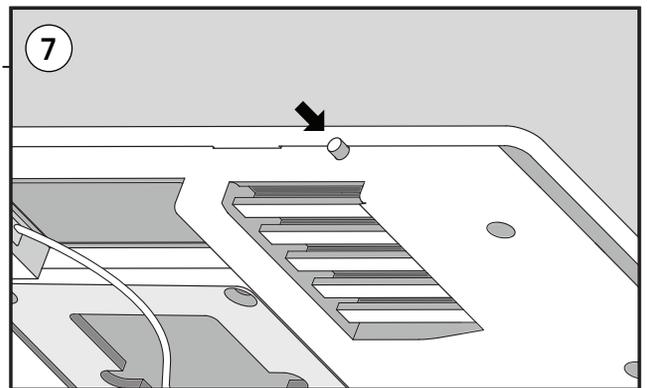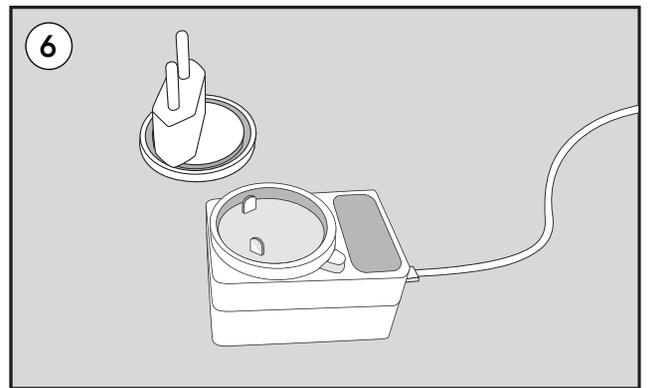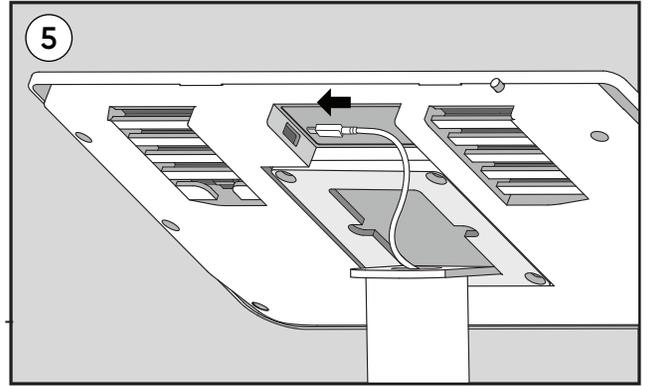


ExpressTab ET01L-4G-FS


Box contents

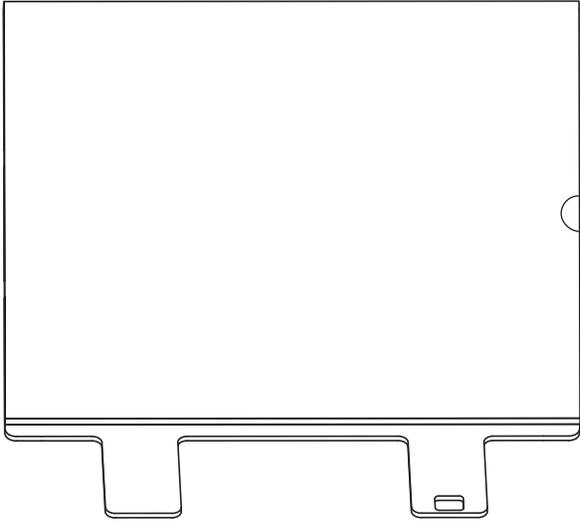


Question holder (A4)

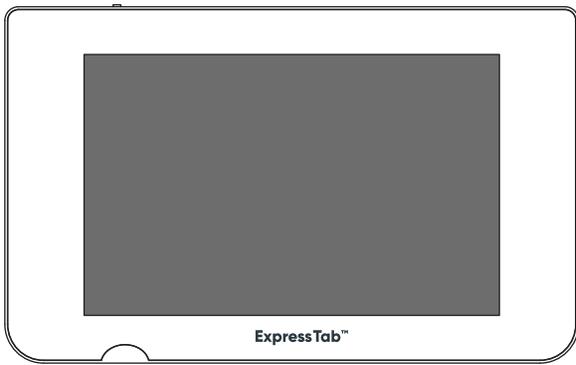

Tablet
(secured in plastic enclosure)

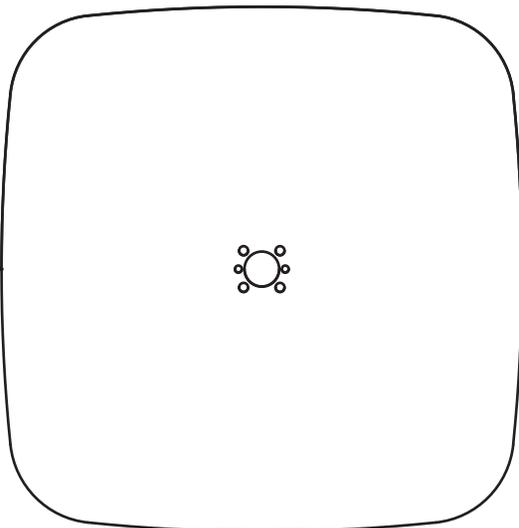



Base




Vesa bracket



2 x Rubber plugs




8 x screw A (16mm)




4 x screw B (12mm)



Hex key

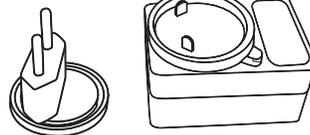

Adapter

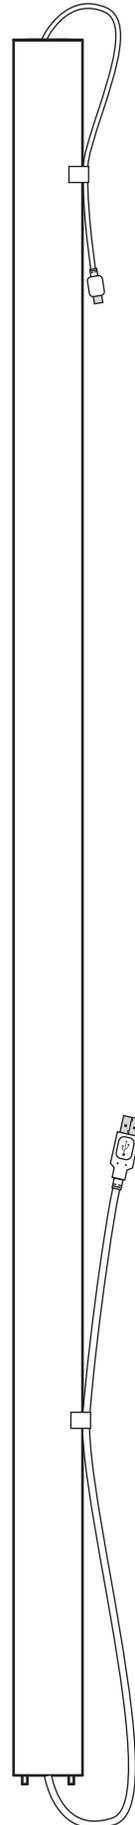

Top

Bottom

Pole with USB cord inserted